



光杆阀尺寸*1


双法兰式 DN50-1600

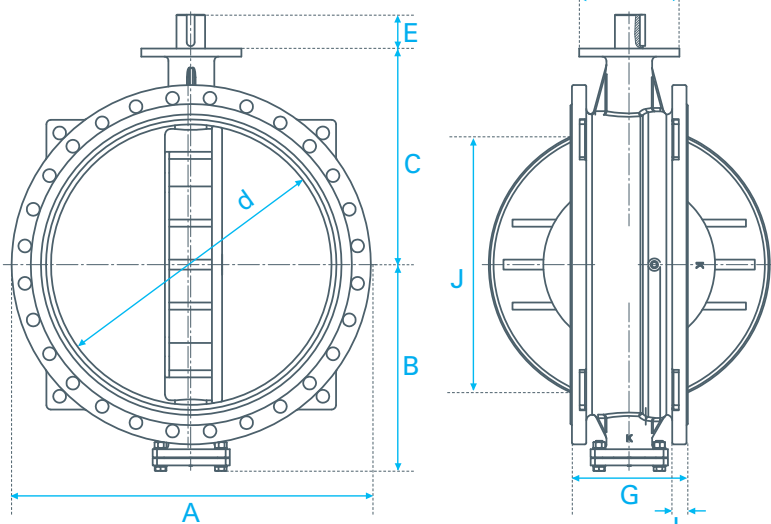

DN50-300 – 包覆阀板

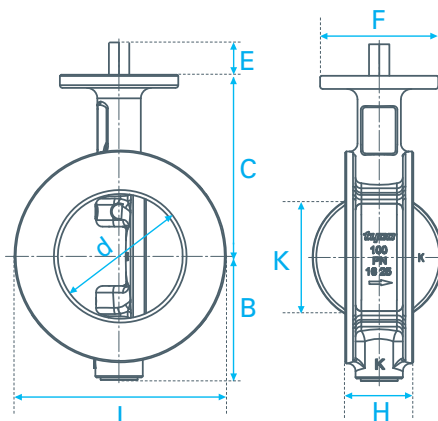

DN350-600 – 阀体密封

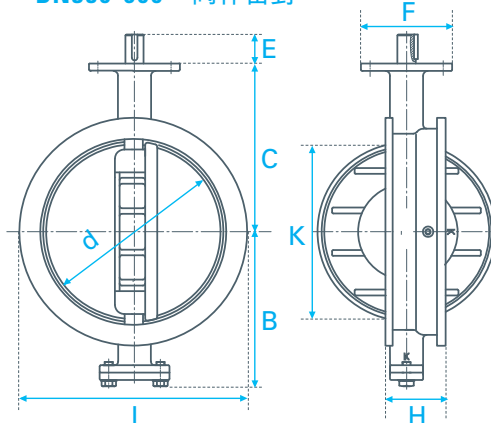

														ISO 5211 顶法兰盘数据					
阀门尺寸	A	B	C	d	E	F	G	H	I	J	K	L		ISO 5211 类型	阀杆 mm	键 WxH mm	PCD Ø mm	孔数	孔 Ø mm
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm						
	PN10	PN16																	
50	165	165	70	105	47	25	65	108	43	106	N-A	28	19.0	F05	9x9	N-A	50	4	7
65	185	185	75	110	60	25	65	112	46	126	N-A	47	19.0	F05	9x9	N-A	50	4	7
80	200	200	80	115	74	25	65	114	46	141	N-A	64	19.0	F05	9x9	N-A	50	4	7
100	220	220	95	140	94	25	90	127	52	161	N-A	84	19.0	F07	11x11	N-A	70	4	9
125	250	250	120	160	118	25	90	140	56	190	N-A	110	19.0	F07	17x17	N-A	70	4	9
150	285	285	125	165	146	25	90	140	56	217	58	140	19.0	F07	17x17	N-A	70	4	9
200	340	340	155	205	191	38	125	152	60	272	125	186	20.0	F10	Ø25	8x7	102	4	12
250	395	405	190	240	237	38	125	165	68	327	178	232	22.0	F10	Ø28	8x7	102	4	12
300	445	460	220	275	288	38	150	178	78	377	248	282	24.5	F12	Ø32	10x8	125	4	14
350	505	520	311	330	332	50	150	190	92	433	291	330	24.5	F12	Ø35	10x8	125	4	14
400	565	580	353	365	382	75	150	216	102	484	335	383	24.5	F12	Ø35	10x8	125	4	14
450	615	640	377	400	434	75	150	222	114	534	391	435	25.5	F12	Ø45	14x9	125	4	14
500	670	715	421	445	484	75	210	229	127	582	443	483	26.5	F16	Ø50	14x9	165	4	22
600	780	840	530	485	583	75	210	267	154	686	541	584	30.0	F16	Ø50	14x9	165	4	22
700	895	910	608	564	677	105	300	292	N-A	N-A	634	N-A	32.5	F25	Ø75	20x12	254	8	18
800	1015	1025	670	624	779	105	300	318	N-A	N-A	736	N-A	35.0	F25	Ø75	20x12	254	8	18
900	1115	1125	685	670	879	105	300	330	N-A	N-A	841	N-A	37.5	F25	Ø75	20x12	254	8	18
1000	1230	1255	722	755	979	118	350	410	N-A	N-A	916	N-A	40.0	F30	Ø100	28x16	298	8	22
1200	1455	1485	840	880	1179	122	350	470	N-A	N-A	1107	N-A	40.0	F30	Ø120	32x18	298	8	22
1400	1675	1685	1000	950	1370	145	415	530	N-A	N-A	1297	N-A	46.0	F35	Ø150	36x20	356	8	34
1600	1915	N-A	1118	1130	1567	150	415	600	N-A	N-A	1486	N-A	49.0	F35	Ø150	36x20	356	8	34

*注:

1. 蝶阀放置时建议横向水平放置为佳。